



SV-254

BRASS SAFETY VALVE

GENERAL FEATURES

The AYVAZ SV-254 brass safety valve is used in non-critical applications for air, steam and water. They are 3/8" - 3" in size and threaded connection.

Usage areas:

- Steam (PTFE Gasket)
- Water and non aggressive liquids
- Non-hazardous Gases

Note:

If the valve is separated, changed or opened, the manufacturer and the vendor shall not accept any responsibility for any faults that may occur.

Installation:

- 1- Storage and transportation and installation should be done with care.
- 2- The valve should be protected from foreign substances and dust until the installation time.
- 3- The valve shaft should be mounted so that it is vertical.
- 4- No valve should be placed between safety valve and pressure vessel.
- 5- The safety valve must have an easily accessible area where installed.

6- Safety valve outlet pipe should be opened at the shortest path to the atmosphere.

7- The relief valve should be inclined in the direction of the outlet pipe.

8- If the safety valve is uplifted, then one of the options should be to design drainage, pot (diameter of inner pipe), diameter enlargement in order to get water that may occur at the elbow part.

9- Separate outlet line for each safety valve. If it is going to enter the exhaust pipe; the distance between the safety valve output and the exhaust must be at least 4 meters.


Dimensions (mm)				
Çap	A	B	C	D
1/2"	127	51	27	27
3/4"	153	58	33.5	30
1"	155	70,5	40	36

Material	
Body	Brass - Bronze
Valve	Teflon - metal
Connection	
ISO 228 / 1 threaded	

Dimension	Weight(kg)
1/2"	0,400
3/4"	0.600
1"	0.870

Working Conditions	
Max. Working Pressure	12 bar
Working Pressure Setting Range	0- 12 bar
Working Temp.	Metal Blocker 0- 200 C
Working Temp.	Teflon Blocker 0- 180 C

SV-254 BRASS SAFETY VALVE

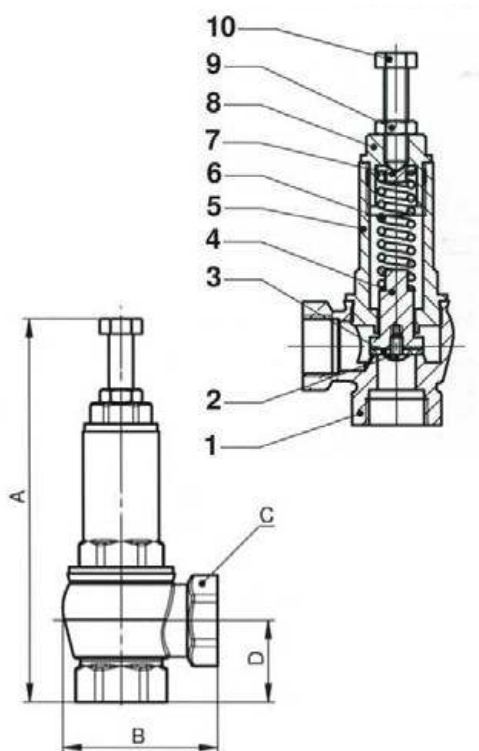

MATERIAL		
1	Body	Brass
2	Screw	CW 614/617
3	Gasket	Metal-PTFE
4	Washer	CW 614/617
5	Intermediate Body	CW 614/617
6	Spring	C72 / AISI 302
7	Spring Stem	CW 614/617 CC 75 4S
8	Cover	CW6 14/617
9	Fixing Nut	CW614/617
10	Adj. Screw	CW6 14/617

WATER DISCHARGE CAPACITY									
Dia.	3/8	1/2	3/4	1	1 ¼	1 ½	2	2 ½	3
P (bar)	m³/h								
1	0,6	1	2	3,7	5,4	8,2	13	26,1	33,9
2	0,7	1,2	2,5	4,6	6,7	10	15,9	32	41,6
3	0,8	1,4	2,9	5,3	7,7	11,5	18,4	37	48
4	0,9	1,5	3,2	5,9	8,6	12,9	20,6	41,3	53,7
5	1	1,7	3,5	6,5	9,4	14,1	22,6	45,3	58,8
6	1,1	1,8	3,8	7,0	10,2	15,3	24,4	48,9	63,5
7	1,2	1,9	4,1	7,5	10,9	16,3	26	52,3	67,9
8	1,2	2	4,3	7,9	11,5	17,3	27,6	55,4	72,0
9	1,3	2,1	4,6	8,3	12,1	18,2	29,1	58,4	75,9
10	1,4	2,2	4,8	8,8	12,7	19,1	30,5	61,3	79,6
11	1,4	2,3	5,0	9,1	13,3	20	31,9	64,0	83,2
12	1,5	2,4	5,2	9,5	13,8	20,8	33,2	66,6	86,6

STEAM DISCHARGE CAPACITY									
Dia.	3/8	1/2	3/4	1	1 ¼	1 ½	2	2 ½	3
P (bar)	Kg/h								
1	7,6	12,3	26,2	47,9	69,8	104,9	167,4	335,9	436,2
2	11,2	18,2	38,8	71	103,3	155,3	247,8	497,2	645,8
3	14,8	24,1	51,2	93,8	136,5	205,3	327,5	657,1	853,5
4	18,4	29,9	63,6	116,4	169,5	254,9	406,6	815,9	1059,8
5	22	35,7	75,9	139	202,3	304,2	485,3	973,9	1264,9
6	25,6	41,5	88,2	161,5	235	353,4	563,8	1131,4	1469,6
7	29,1	47,2	100,5	183,9	267,6	402,5	642,1	1288,5	1673,6
8	32,6	52,9	112,7	206,2	300,2	451,4	720,1	1445,1	1877
9	36,2	58,7	124,9	228,6	332,7	500,4	798,2	1601,8	2080,5
10	39,7	64,4	137	250,8	365,1	549,1	876	1757,8	2283,2
11	43,2	70,1	149,2	273,1	397,6	598	953,9	1914,1	2486,3
12	46,8	75,8	161,4	295,4	430	646,7	1031,6	2070,1	2688,8