

SPECIAL HOT WATER TANKS

COMBINED STRATIFIED TANKS

KWS 500

KWS 800

KWS 1000

KWS 1500

KWS 800 R2



KWS 1000 R2

KWS 1500 R2



COMBINED STRATIFIED TANKS

KWS

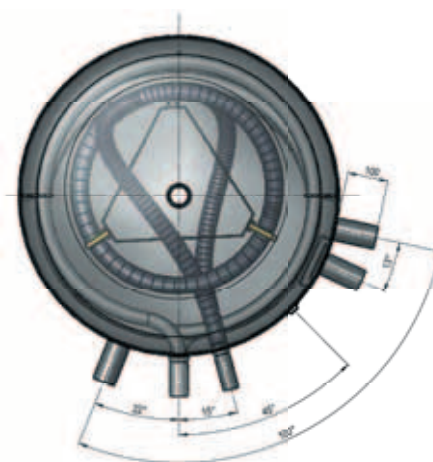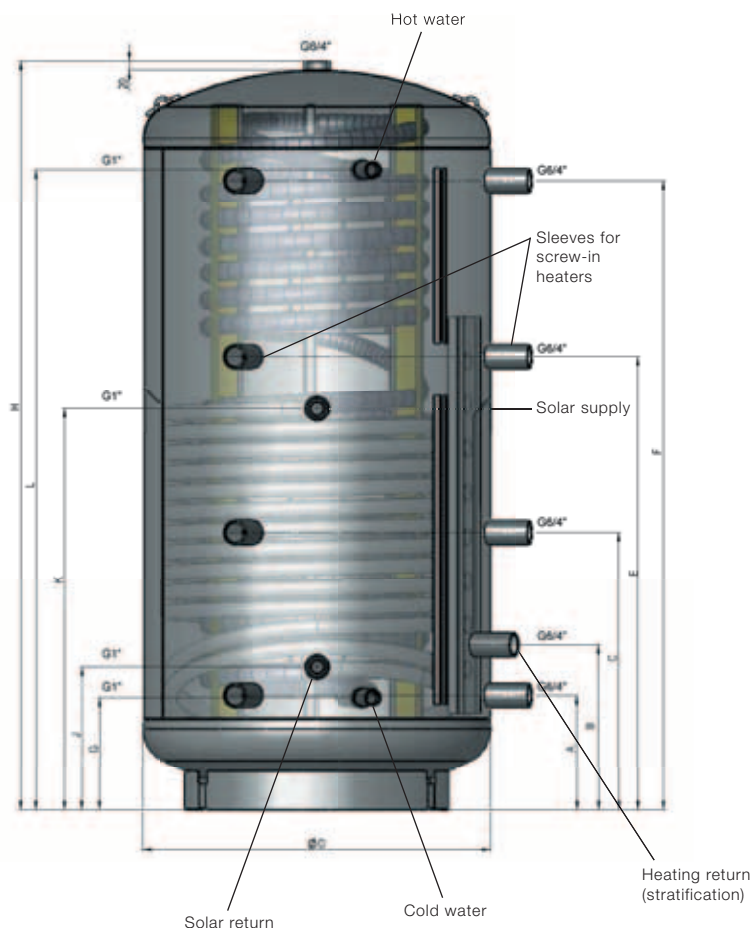



- High-quality fixing for the stainless steel corrugated pipe
- Large heat exchanger for connection to a solar energy system
- Stratification device for energy-efficient stratification of heating return
- For the product Type KWS 800 / 1000 R2 there are 2 off 6/4" screw-in sockets for the option of additional electric immersion heaters
- It is possible to connect another buffer tank in series (cascade connection)
- Operating pressure: corrugated pipe 6 bar, buffer tank 3 bar, heat exchanger 10 bar
- New 100 mm ECO SKIN 2.0 insulation

Model	Buffer tank capacity in litres	Dimensions in mm without insulation											Diagonal height	Corrugated pipe (m ²)	Heat exchanger surface (m ²)	Capacity of stainless steel corrugated pipe	Installed length of screw-in heater sleeve	Standby energy consumption kWh/24h*
		H	Ø D	A	B	C	E	F	G	J	K	L						
KWS 500	500	1640	650	220	335	620	1010	1390	220	290	740	1425	1700	5	1,8	25	700	2,6
KWS 800	800	1686	790	260	368	630	1030	1430	255	318	813	1443	1750	6,5	2,5	33	840	3,4
KWS 1000	1000	2036	790	310	418	745	1250	1710	255	318	948	1793	2070	7,5	3,1	39	840	3,8
KWS 1500	1500	2142	1000	380	470	825	1350	1760	306	370	910	1826	2270	7,5	3,5	39	1050	4,5

*Standby energy consumption in kWh/24h according to EN 12897

COMBINED STRATIFIED TANKS

KWS R2

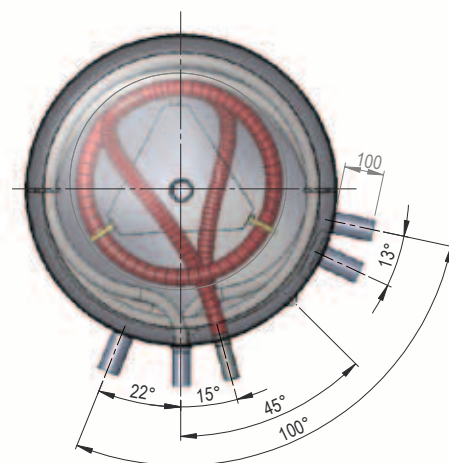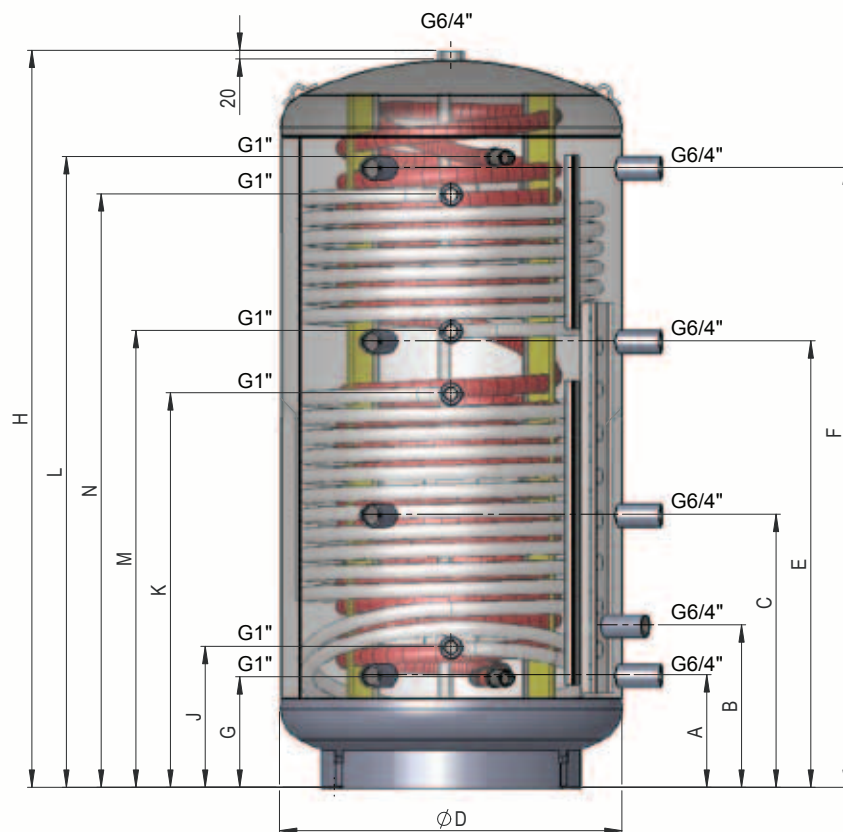

- High-quality fixing for the stainless steel corrugated pipe
- Two large heat exchangers for connection to a solar energy system and a second heating source
- Stratification device for energy-efficient stratification of heating return
- For the product Type KWS 800 / 1000 R2 there are 2 off 6/4" screw-in sockets for the option of additional electric immersion heaters
- It is possible to connect another buffer tank in series (cascade connection)
- Operating pressure: corrugated pipe 6 bar, buffer tank 3 bar, heat exchanger 10 bar
- New 100 mm ECO SKIN 2.0 insulation

Model	Buffer tank capacity in litres	Dimensions in mm without insulation													Diagonal height	Corrugated pipe (m ²)	Heat exchanger surface (m ²)	Capacity of stainless steel corrugated pipe	Installed length of screw-in heater sleeve	Standby energy consumption kWh/24h*
		H	Ø D	A	B	C	E	F	G	J	K	L	M	N						
KWS 800 R2	800	1686	790	260	368	630	1030	1430	255	318	813	1443	1064	1379	1750	6,5	2,5+1,6	33	840	3,6
KWS 1000 R2	1000	2036	790	310	418	745	1250	1710	255	318	948	1793	1284	1734	2070	7,5	3,1+2,4	39	840	3,9
KWS 1500 R2	1500	2142	1000	380	470	825	1350	1760	306	370	910	1826	1310	1760	2270	7,5	3,5+2,4	39	-	4,7

*Standby energy consumption in kWh/24h according to EN 12897