

# Sanibest Pro



7 m  
110 m



BVCert. 0043504



## PRODUCT BENEFITS

- Suitable for commercial premises
- Ultra-performing grinding with the Pro X K2 grinder (dilaceration system similar to our above-ground and underground stations)
- Easy access to the electrical chamber

## CONNECTIONS

← Discharge diameter ext. : 22/28/32 mm

→ External inlet diameter : 40, 100 mm

- Access directly to the electrics via the lid




Pro X K2 grinder



## PACK CONTAINS

non-return valve, connectors,  
activated carbon filter to neutralise odours

## CURVE

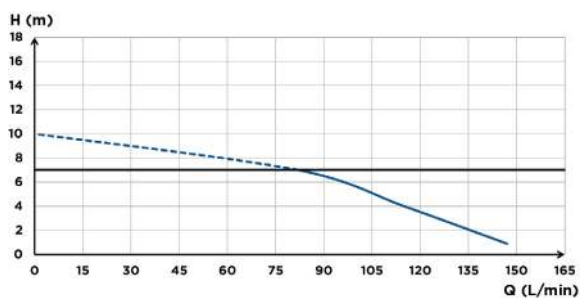

— recommended max height: 7 m

## TECHNICAL FEATURES

Number of inlets	4
External inlet diameter	40, 100 mm
Discharge diameter ext.	22/28/32 mm
Max. incoming temperature	35 °C
Min. shower tray height	150 mm
Activation level	85 mm
Voltage / Frequency	220-240 V / 50-60 Hz
Motor power	1100 W
IP Rating	IP44
Electrical class	I
Identification and logistics	
Gross weight	12 kg
EAN code	3308810042799
Product code	B3PRO

## OPTIONAL

Sanialarm  
3308810042799  
ALARM  
See p. 27



## DIMENSIONS

