


AER CONDITIONAT INVERTER

CONTER BREEZE







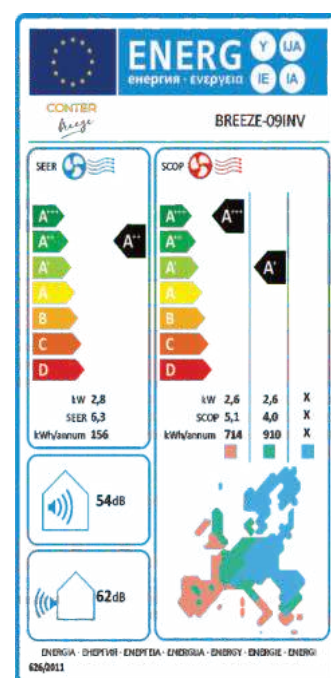

Specificatii tehnice **9000 BTU**

Model			CONTER BREEZE 09 INV
Denumire model Midea			MSAFU-09HRFN8-QRD1GW
Unitate Interioara			MSAFU-09HRFN8-QRD1GW
Unitate Exterioara			MOX133-09HFN8-QRD1GW
Alimentare		Ph-V-Hz	220-240V,1Ph,50Hz
Racire nominala	Capacitate	Btu/h	9000 (3100~11600)
Putere racire intrare		W	800 (100~1240)
Curent racire		A	3.48 (0.4~5.4)
Incalzire nominala	Capacitate	Btu/h	10000 (2800~11500)
Putere incalzire intrare		W	930 (120~1200)
Curent incalzire		A	4.05 (0.5~5.5)
Racire sezoniera	Pdesignc	kW	2.6
	SEER	WW	7.0
	Clasa eficienta energetica		A++
Incalzire(medie)	Pdesignh	kW	2,3
	SCOP	WW	4,1
	Clasa eficienta energetica		A+
	Tbiv	°C	-7
Tol		°C	-15
Indepartare umiditate		L/h	/
Consum max. intrare		W	2150
Curent max.		A	10
Curent pornire		A	0
Compresor	Model		KSK103D32UEZ31
	Tip		Rotativ
	Brand		GMCC
	Capacitate	Btu/h	3245
	Intrare	W	850
	Curent nominal (RLA)	A	6
	Amplificator rotor blocat (LRA)	A	/
	Protector termic		/
	Pozitie protector termic		/
	Condensator	uF	/
	Ulei Refrigerant/incarcare ulei	ml	ESTER OIL VG74 280



Motor ventilator unitate interioara	Model		ZKFP-30-8-357L
	lesire	W	35
	Condensator	uF	/
	Viteza (Hi/Mi/Lo)	r/min	1100 / 900 / 750
Serpentina unitate interioara	a. Numar de randuri		2.0
	b. Pas tub(a)x pas rand(b)	mm	19.5x11.6
	c. Distanta aripioare	mm	1.2
	d. Tip aripioare (cod)		Aluminiu hidrofilic
	e. Diametru ext. tub si tip	mm	Φ5, canal interior tub
	f. Lungime x inaltime x latime serpentina	mm	510x78x23.2+510x97,5x23.2+510x78x23.2
	g. Numar circuite		3
Debit aer unitate interioara (Hi/Mi/Lo)		m3/h	435/333/259
Nivel zgomot unitate interioara (Hi/Mi/Lo/Si)		dB(A)	37/32/25/21.5
Nivel zgomot unitate interioara (Hi)		dB(A)	50,0
Unitate interioara	Dimensiuni(W*D*H)	mm	715x194x285
	Ambalare (W*D*H)	mm	780x270x365
	Masa neta/bruta	Kg	6,7/8,8
Motor ventilator unitate exteriora	Model		ZKFN-25-10-5L
	lesire	W	/
	Condensator	uF	/
	Viteza (Hi/Mi/Lo)	r/min	1
Serpentina unitate exteriora	a. Numar de randuri		1
	b. Pas tub(a)x pas rand(b)	mm	18x17,3
	c. Distanta aripioare	mm	1.3
	d. Tip aripioare (cod)		Aluminiu hidrofilic
	e. Diametru ext. tub si tip	mm	Φ5, canal interior tub
	f. Lungime x inaltime x latime serpentina	mm	745x468x17,3
	g. Numar circuite		3
Debit aer unitate exteriora		m3/h	1750
Nivel zgomot unitate exteriora		dB(A)	55
Nivel max. zgomot unitate exteriora		dB(A)	59
Unitate exteriora	Dimensiuni(W*D*H)	mm	720x270x495
	Ambalare (W*D*H)	mm	835x300x540
	Masa Neta/bruta	Kg	21/22,8
Refrigerant	tip		R32
	GWP		675
	Cantitate incarcare	Kg	0.47
Presiune proiectata		MPa	4.3/1.7
Conducte refrigerant	Lateral lichid/ lateral gaz	mm(inch)	6.35mm(1/4in)/9.52mm(3/8in)
	Lungime max. conducta refrigerant	m	25
	Diferenta max. de nivel	m	10
Conexiuni cablaj			1.5x5//
Tip stecher			//fara
Tip termostat			Comanda de la distanta
Temperatura lucru	Unitate interioara(racire/ incalzire)	℃	17~32/0~30
	Unitate exteriora(racire/ incalzire)	℃	-15~50 / -20~30
Domeniu aplicare minim-maxim		m2	12~18

Caracteristici principale

-  Racire si incalzire
-  Control prin WIFI
-  Functie Follow me
-  Auto curatare
-  Auto restart
-  Mod noapte (Sleep mode)

CONTER

breeze