

Technical Data Sheet

CODE 16120

CA 100 MD E W

Centrifugal duct fans for wall mounting



Certifications




CB TEST CERTIFICATE

Technical and performance data

Frequency (Hz)	50-60	Max airflow at Min speed at 60 Hz (m³/h)	135
Insulation class	II°	Max pressure at 60 Hz (mmH2O)	33,7
IP	44	Max pressure at Max speed (mmH2O)	32,5
Max absorbed current at maMinx speed at 60 Hz (A)	0,16	Max pressure at Max speed (Pa)	319
Max absorbed current at Max speed (A)	0,22	Max pressure at Max speed at 60Hz (Pa)	331
Max absorbed current at Max speed at 60 Hz (A)	0,26	Max pressure at Mid speed (mmH2O)	29,1
Max absorbed current at Mid speed (A)	0,20	Max pressure at Mid speed (Pa)	285
Max absorbed current at Mid speed at 60 Hz (A)	0,24	Max pressure at Mid speed at 60Hz (mmH2O)	26,8
Max absorbed current at Min speed (A)	0,15	Max pressure at Mid speed at 60Hz (Pa)	263
Max absorbed power at Max speed (W)	42	Max pressure at Min speed at 60Hz (mmH2O)	12,9
Max absorbed power at Max speed at 60 Hz (W)	45	Max pressure at Min speed at 60Hz (Pa)	127
Max absorbed power at Mid speed (W)	30	Max RPM	2120
Max absorbed power at Mid speed at 60 Hz (W)	35	Max speed at 60 Hz (Rpm)	1995
Max absorbed power at Min speed at 60 Hz (W)	16	Mid speed at 60 Hz (Rpm)	1670
Max ambient temperature for continuous operation (°C)	50	Min RPM	925
Nominal diameter (mm)	100	Min speed at 60 Hz (Rpm)	1035
Power absorbed at 1st speed (W)	13	Potenza sonora at supply side at Min speed LWA [dB (A)]	46,5
Voltage (V)	220-240	Pressure at 1st speed (mmH2O)	11,6
Weight (Kg)	3,3	Pressure at 1st speed (Pa)	114
Airflow at 1st speed (l/s)	33	RPM at Mid speed	1760
Airflow at 1st speed (m³/h)	120	Sound power at extract side at Max speed LWA [dB (A)]	82,7
Breakout sound power at Max speed at 60 Hz LWA [dB (A)]	54,5	Sound power at extract side at Mid speed LWA [dB (A)]	76,3
Breakout sound power at Mid speed at 60 Hz LWA [dB (A)]	48,3	Sound power at extract side at Min speed LWA [dB (A)]	56
Breakout sound power at Min speed at 60 Hz LWA [dB (A)]	34,7	Sound power at supply side at Max speed LWA [dB (A)]	74,1
Breakout sound power LWA at Max speed [dB (A)]	56,8	Sound power at supply side at Mid speed LWA [dB (A)]	66,8
Breakout sound power LWA at Mid speed [dB (A)]	49,4	Sound powerat at extraction side at Max speed at 60 Hz LWA [dB (A)]	80,7
Breakout sound power LWA at Min speed [dB (A)]	32,7	Sound powerat at extraction side at Mid speed at 60 Hz LWA [dB (A)]	74,9
breakout sound pressure at 3m at Max speed at 60 Hz Lp [dB (A)]	37	Sound powerat at extraction side at Min speed at 60 Hz LWA [dB (A)]	59,8
Breakout sound pressure at 3m at Max speed Lp [dB (A)]	39,3	Sound powerat at supply side at Max speed at 60 Hz LWA [dB (A)]	71,7
breakout sound pressure at 3m at Mid speed at 60 Hz Lp [dB (A)]	30,7	Sound powerat at supply side at Mid speed at 60 Hz LWA [dB (A)]	65,6
Breakout sound pressure at 3m at Mid speed Lp [dB (A)]	31,9	Sound powerat at supply side at Min speed at 60 Hz LWA [dB (A)]	49,7
		Sound pressure at extract side at 3m at Max speed at 60 HzLp [dB (A)]	63,2

breakout sound pressure at 3m at Min speed at 60 Hz Lp [dB (A)]	17,2	Sound pressure at extract side at 3m at Max speed Lp [dB (A)]	65,2
Breakout sound pressure at 3m at Min speed Lp [dB (A)]	15,2	Sound pressure at extract side at 3m at Mid speed at 60 HzLp [dB (A)]	48,1
Max airflow at Max speed (l/s)	79	Sound pressure at extract side at 3m at Mid speed Lp [dB (A)]	58,8
Max airflow at Max speed (m³/h)	285	Sound pressure at extract side at 3m at Min speed at 60 HzLp [dB (A)]	42,3
Max airflow at Max speed at 60 Hz (m³/h)	75	Sound pressure at extract side at 3m at Min speed Lp [dB (A)]	38,5
Max airflow at Mid speed (m³/h)	235	Sound pressure at suply side at 3m at Max speed Lp [dB (A)]	56,6
Max airflow at Mid speed at 60 Hz (l/s)	63	Sound pressure at suply side at 3m at Mid speed Lp [dB (A)]	49,3
Max airflow at Mid speed at 60 Hz (m³/h)	225	Sound pressure at suply side at 3m at Min speed Lp [dB (A)]	29
Max airflow at Min speed (l/s)	65	Sound pressure at supply side at 3m at Max speed at 60 HzLp [dB (A)]	54,2
Max airflow at Min speed at 60 Hz (l/s)	38	Sound pressure at supply side at 3m at Mid speed at 60 HzLp [dB (A)]	57,4
		Sound pressure at supply side at 3m at Min speed at 60 HzLp [dB (A)]	32,1

Dimensions

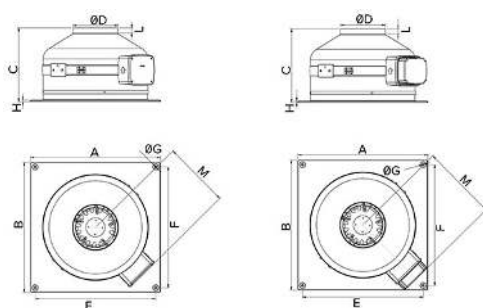

Size A (mm)	334
Size B (mm)	334
Size C (mm)	210
Size D (mm)	Ø 97
Size E (mm)	304
Size F (mm)	304
Size G (mm)	Ø 5
Size H (mm)	5
Size L (mm)	15
Size M (mm)	198

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:
prevendita@vortice-italy.com
 After Sales:
postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND

Sales Dept:
sales@vortice.ltd.uk
 Technical Dept:
technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:
export@vortice-italy.com
 After Sales:
after-sales@vortice-italy.com

Technical Data Sheet

CODE 16120

CA 100 MD E W

Centrifugal duct fans for wall mounting





Description

- Pickled and phosphated steel housing/wall mounting plate with polyester powder-coated finish, resistant to the aggressive action of atmospheric agents.
- Nominal diameter 100 mm.
- 3 speed fan consisting of:
- AC motor with thermal overload cutout and shaft turning in ball

- bearings,
- backward curved impeller.
- Operation controllable by remote sensors monitoring: Temperature, Relative Humidity, Smoke and Presence.
- Zinc-coated steel brackets for wall mounting.

Curves

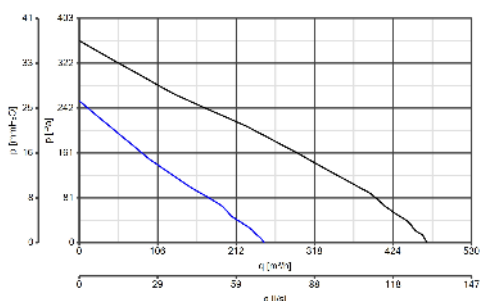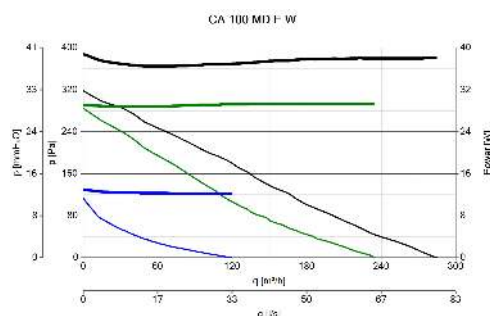


Accessories



KIT SCB (TRASF.E.C.)

Code 22481



CA-G 100 (GRIGLIA DI PROTEZIONE)

Code 22750



PGR 250 (PERSIANA GRAVITA')

Code 50150



C TEMP

Code 12992



C SMOKE

Code 12993



C HCS

Code 12994



C PIR

Code 12998

C TIMER



C TIMER

Code 12999

**TRA 250
(TELAIO CON
RETE ANTINF.)**

Code 51150

TRIO D

Code 12866

**TRIO-LINEO
503**

Code 12891

PER INFORMAZIONI / FOR INFORMATION

ITALY

Pre Sales:

prevendita@vortice-italy.com

After Sales:

postvendita@vortice-italy.com

UNITED KINGDOM & REP. OF

IRELAND

Sales Dept:

sales@vortice.ltd.uk

Technical Dept:

technical@vortice.ltd.uk

OTHER COUNTRIES

Sales Dept:

export@vortice-italy.com

After Sales:

after-sales@vortice-italy.com

Technical Data Sheet

CODE 16121

CA 125 MD E W

Centrifugal duct fans for wall mounting



Certifications



IMQ



CE



IMQ Performance



EAC




G-Mark

TECHNICAL AND PERFORMANCE DATA

Absorbed power 1st speed (W)	25	Delivery 1st speed (l/s)	44.4
Frequency (Hz)	50/60	Delivery 1st speed (m³/h)	160
Insulation Class	II°	Max delivery at max speed (l/s)	123.6
IP	44	Max delivery at max speed (m³/h)	445
Max absorbed Power at 60Hz (W)	100	Pressure - 1st speed (mmH2O)	13.9
Max ambient temperature for continuous operation (°C)	50	Pressure - 1st speed (Pa)	136.5
Max. absorbed Current at max. speed (A)	0,23	Pressure max - max speed (mmH2O)	36.2
Max. absorbed Current at min. speed (A)	0.13	Pressure max - max speed (Pa)	355.9
Max. absorbed power at max speed (W)	85	RPM max	2445
Nominal Diameter (mm)	125	RPM min	935
Voltage (V)	220-240	Sound pressure level Lp [dB (A)] 3m - max speed	39.4
Weight (Kg)	3,8	Sound pressure level Lp [dB (A)] 3m - min speed	25.5

DIMENSIONS

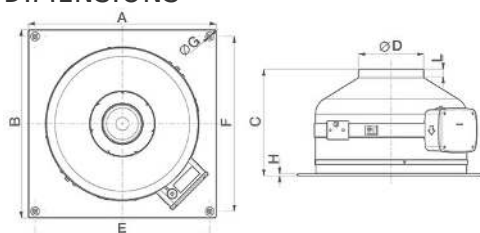

Size A (mm)	334
Size B (mm)	334
Size C (mm)	210
Size D (mm)	Ø 122
Size E (mm)	304
Size F (mm)	304
Size G (mm)	Ø 5
Size H (mm)	5
Size L (mm)	23
Size M (mm)	198

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 16121

CA 125 MD E W



Centrifugal duct fans for wall mounting



DESCRIPTION

- Pickled and phosphated steel housing/roof mounting plate with polyester powder-coated finish, resistant to the aggressive action of atmospheric agents.
- Nominal diameter 125 mm.
- 3 speed fan through TRIO-CA optional control (cod. 12869), consisting of:
 - AC motor with thermal overload cutout and shaft turning in ball bearings,
 - backward curved impeller.
- Operation controllable by remote sensors monitoring: Temperature, Relative Humidity, Smoke and Presence.
- Zinc-coated steel brackets for wall mounting.

CURVES

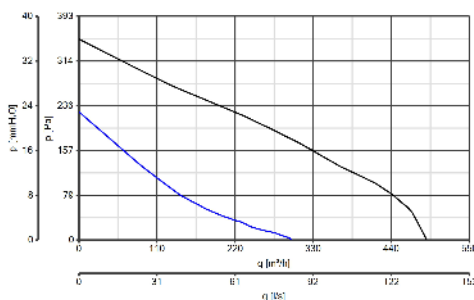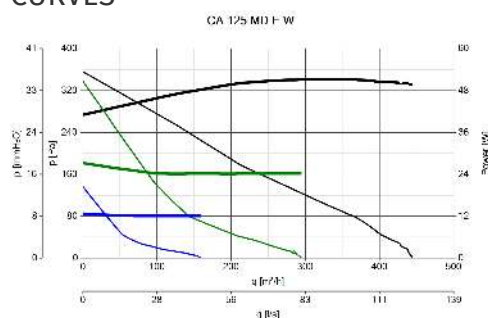

ACCESSORIES



TRIO-CA
Code 12869



**KIT SCB
(TRASF.E.C.)**
Code 22481



**CA-G 125
(GRIGLIA DI
PROTEZIONE)**
Code 22755



**C 1.5
(COMANDO EL.
1.5 A)**
Code 12966

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 16133

CA 150 MD E W

Centrifugal duct fans for wall mounting



Certifications




IMQ Performance



TECHNICAL AND PERFORMANCE DATA

Absorbed power 1st speed (W)	39	Delivery 1st speed (l/s)	111.1
Frequency (Hz)	50/60	Delivery 1st speed (m³/h)	400
Insulation Class	II°	Max delivery at max speed (l/s)	171.3
IP	44	Max delivery at max speed (m³/h)	617
Max absorbed Power at 60Hz (W)	115	Pressure - 1st speed (mmH2O)	31.6
Max ambient temperature for continuous operation (°C)	55	Pressure - 1st speed (Pa)	310.4
Max. absorbed Current at max. speed (A)	0,38	Pressure max - max speed (mmH2O)	43.8
Max. absorbed Current at min. speed (A)	0.34	Pressure max - max speed (Pa)	429.7
Max. absorbed power at max speed (W)	85	RPM max	2690
Nominal Diameter (mm)	150	RPM min	1740
Voltage (V)	220-240	Sound pressure level Lp [dB (A)] 3m - max speed	53.3
Weight (Kg)	4,8	Sound pressure level Lp [dB (A)] 3m - min speed	41.4

DIMENSIONS

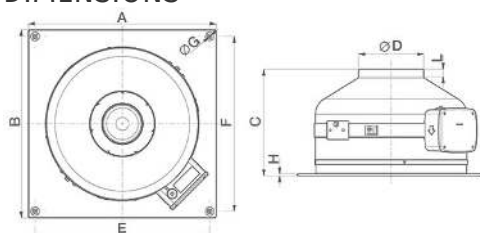

Size A (mm)	424
Size B (mm)	424
Size C (mm)	245
Size D (mm)	Ø 147
Size E (mm)	394
Size F (mm)	394
Size G (mm)	Ø 5
Size H (mm)	5
Size L (mm)	17
Size M (mm)	220

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 16133

CA 150 MD E W


Centrifugal duct fans for wall mounting



DESCRIPTION

- Pickled and phosphated steel housing/roof mounting plate with polyester powder-coated finish, resistant to the aggressive action of atmospheric agents.
- Nominal diameter 150 mm.
- 3 speed fan through TRIO-CA optional control (cod. 12869), consisting of:
 - External rotor AC motor with thermal overload cutout and shaft turning in ball bearings,
 - backward curved impeller.
- Operation controllable by remote sensors monitoring: Temperature, Relative Humidity, Smoke and Presence.
- Zinc-coated steel brackets for wall mounting.

CURVES

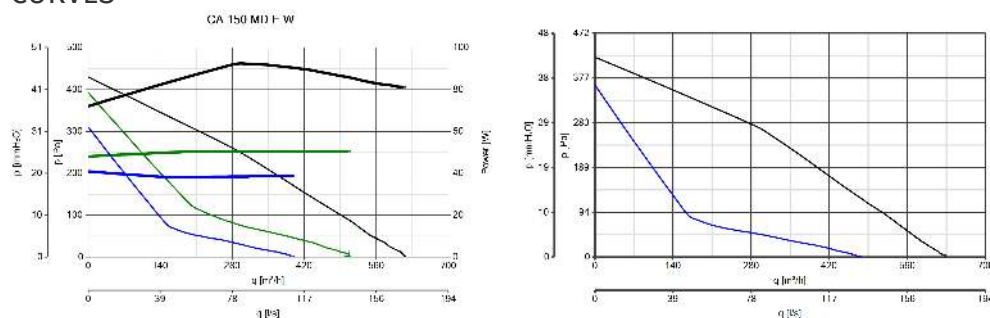

ACCESSORIES



TRIO-CA
Code 12869



**KIT SCB
(TRASF.E.C.)**
Code 22481



**CA-G 150
(GRIGLIA DI
PROTEZIONE)**
Code 22760



**C 1.5
(COMANDO EL.
1.5 A)**
Code 12966

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 16134

CA 160 MD E W

Centrifugal duct fans for wall mounting



Certifications



IMQ



CE



IMQ Performance



EAC




G-Mark

TECHNICAL AND PERFORMANCE DATA

Absorbed power 1st speed (W)	38	Delivery 1st speed (l/s)	107.1
Frequency (Hz)	50/60	Delivery 1st speed (m³/h)	385.8
Insulation Class	II°	Max delivery at max speed (l/s)	184.7
IP	44	Max delivery at max speed (m³/h)	665
Max absorbed Power at 60Hz (W)	115	Pressure - 1st speed (mmH2O)	28
Max ambient temperature for continuous operation (°C)	55	Pressure - 1st speed (Pa)	275.1
Max. absorbed Current at max. speed (A)	0,38	Pressure max - max speed (mmH2O)	42.4
Max. absorbed Current at min. speed (A)	0.35	Pressure max - max speed (Pa)	416.7
Max. absorbed power at max speed (W)	85	RPM max	2680
Nominal Diameter (mm)	160	RPM min	1570
Voltage (V)	220-240	Sound pressure level Lp [dB (A)] 3m - max speed	53
Weight (Kg)	6,2	Sound pressure level Lp [dB (A)] 3m - min speed	43

DIMENSIONS

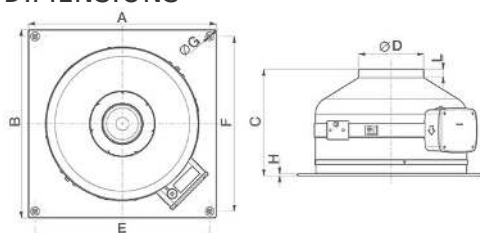

Size A (mm)	424
Size B (mm)	424
Size C (mm)	245
Size D (mm)	Ø 157
Size E (mm)	394
Size F (mm)	394
Size G (mm)	Ø 5
Size H (mm)	5
Size L (mm)	18
Size M (mm)	220

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 16134

CA 160 MD E W



Centrifugal duct fans for wall mounting



DESCRIPTION

- Pickled and phosphated steel housing/roof mounting plate with polyester powder-coated finish, resistant to the aggressive action of atmospheric agents.
- Nominal diameter 160 mm.
- 3 speed fan through TRIO-CA optional control (cod. 12869), consisting of:
 - External rotor AC motor with thermal overload cutout and shaft turning in ball bearings,
 - backward curved impeller.
- Operation controllable by remote sensors monitoring: Temperature, Relative Humidity, Smoke and Presence.
- Zinc-coated steel brackets for wall mounting.

CURVES

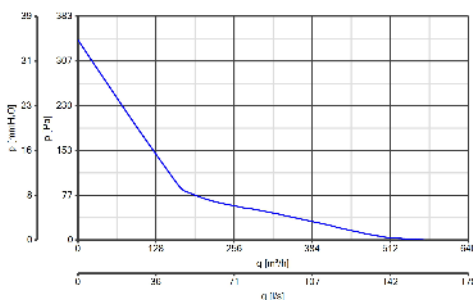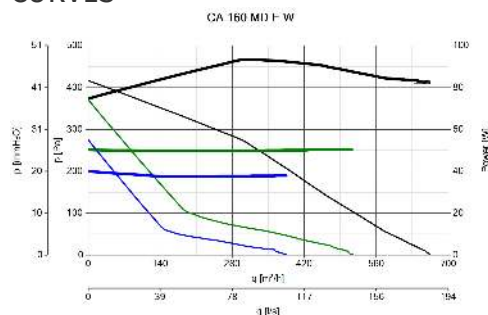

ACCESSORIES



TRIO-CA
Code 12869



**KIT SCB
(TRASF.E.C.)**
Code 22481



**CA-G 160
(GRIGLIA DI
PROTEZIONE)**
Code 22762



**C 1.5
(COMANDO EL.
1.5 A)**
Code 12966

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 16135

CA 200 MD E W

Centrifugal duct fans for wall mounting



Certifications




IMQ Performance



TECHNICAL AND PERFORMANCE DATA

Absorbed power 1st speed (W)	39	Delivery 1st speed (l/s)	126.3
Frequency (Hz)	50/60	Delivery 1st speed (m³/h)	455
Insulation Class	II°	Max delivery at max speed (l/s)	229.1
IP	44	Max delivery at max speed (m³/h)	825
Max absorbed Power at 60Hz (W)	115	Pressure - 1st speed (mmH2O)	34.3
Max ambient temperature for continuous operation (°C)	55	Pressure - 1st speed (Pa)	337.1
Max. absorbed Current at max. speed (A)	0,40	Pressure max - max speed (mmH2O)	44
Max. absorbed Current at min. speed (A)	0.35	Pressure max - max speed (Pa)	432.3
Max. absorbed power at max speed (W)	90	RPM max	2630
Nominal Diameter (mm)	200	RPM min	1455
Voltage (V)	220-240	Sound pressure level Lp [dB (A)] 3m - max speed	48.2
Weight (Kg)	6	Sound pressure level Lp [dB (A)] 3m - min speed	37.9

DIMENSIONS

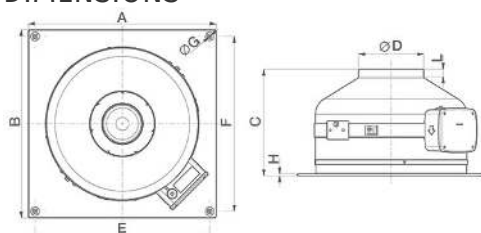

Size A (mm)	424
Size B (mm)	424
Size C (mm)	245
Size D (mm)	Ø 197
Size E (mm)	394
Size F (mm)	394
Size G (mm)	Ø 5
Size H (mm)	5
Size L (mm)	20
Size M (mm)	220

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 16135

CA 200 MD E W


Centrifugal duct fans for wall mounting



DESCRIPTION

- Pickled and phosphated steel housing/roof mounting plate with polyester powder-coated finish, resistant to the aggressive action of atmospheric agents.
- Nominal diameter 200 mm.
- 3 speed fan through TRIO-CA optional control (cod. 12869), consisting of:
 - External rotor AC motor with thermal overload cutout and shaft turning in ball bearings,
 - backward curved impeller.
- Operation controllable by remote sensors monitoring: Temperature, Relative Humidity, Smoke and Presence.
- Zinc-coated steel brackets for wall mounting.

CURVES

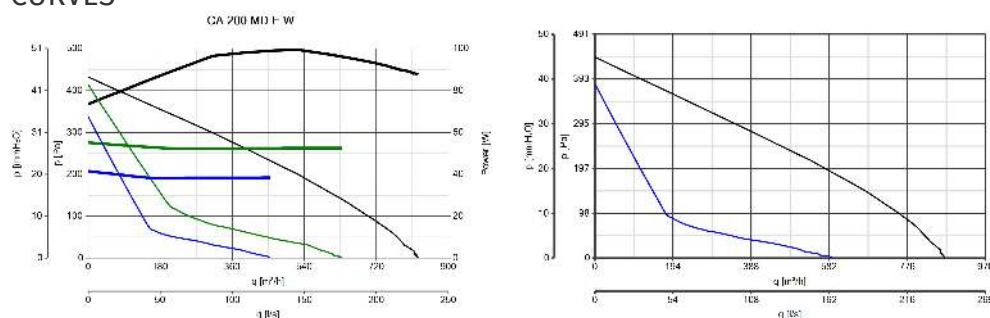

ACCESSORIES



TRIO-CA
Code 12869



**KIT SCB
(TRASF.E.C.)**
Code 22481



**CA-G 200
(GRIGLIA DI
PROTEZIONE)**
Code 22765



**C 1.5
(COMANDO EL.
1.5 A)**
Code 12966

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 16136

CA 250 MD E W

Centrifugal duct fans for wall mounting



Certifications




IMQ Performance



TECHNICAL AND PERFORMANCE DATA

Absorbed power 1st speed (W)	48	Delivery 1st speed (l/s)	138.8
Frequency (Hz)	50/60	Delivery 1st speed (m³/h)	500
Insulation Class	II°	Max delivery at max speed (l/s)	286.1
IP	44	Max delivery at max speed (m³/h)	1030
Max absorbed Power at 60Hz (W)	175	Pressure - 1st speed (mmH2O)	34.9
Max ambient temperature for continuous operation (°C)	50	Pressure - 1st speed (Pa)	342.3
Max. absorbed Current at max. speed (A)	0,55	Pressure max - max speed (mmH2O)	55.9
Max. absorbed Current at min. speed (A)	0.48	Pressure max - max speed (Pa)	548.3
Max. absorbed power at max speed (W)	130	RPM max	2675
Nominal Diameter (mm)	250	RPM min	1340
Voltage (V)	220-240	Sound pressure level Lp [dB (A)] 3m - max speed	50.8
Weight (Kg)	6,2	Sound pressure level Lp [dB (A)] 3m - min speed	31.6

DIMENSIONS

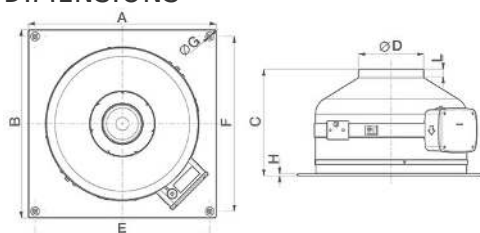

Size A (mm)	424
Size B (mm)	424
Size C (mm)	237
Size D (mm)	Ø 247
Size E (mm)	394
Size F (mm)	394
Size G (mm)	Ø 5
Size H (mm)	5
Size L (mm)	38
Size M (mm)	250

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 16136

CA 250 MD E W



Centrifugal duct fans for wall mounting



DESCRIPTION

- Pickled and phosphated steel housing/roof mounting plate with polyester powder-coated finish, resistant to the aggressive action of atmospheric agents.
- Nominal diameter 250 mm.
- 3 speed fan through TRIO-CA optional control (cod. 12869), consisting of:
 - External rotor AC motor with thermal overload cutout and shaft turning in ball bearings,
 - backward curved impeller.
- Operation controllable by remote sensors monitoring: Temperature, Relative Humidity, Smoke and Presence.
- Zinc-coated steel brackets for wall mounting.

CURVES

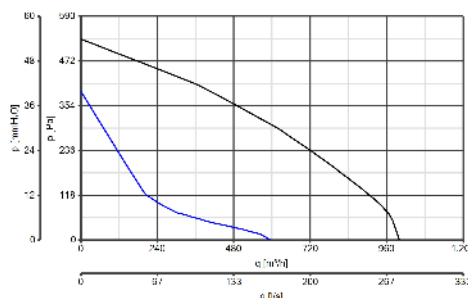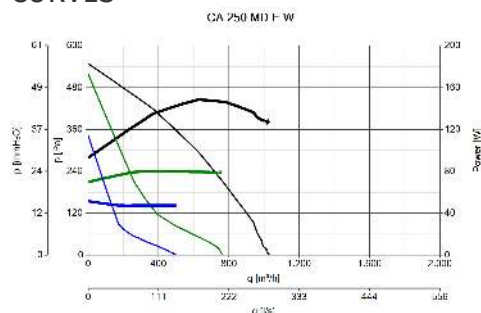

ACCESSORIES



TRIO-CA
Code 12869



KIT SCB
(TRASF.E.C.)
Code 22481



CA-G 250
(GRIGLIA DI
PROTEZIONE)
Code 22770



C 1.5
(COMANDO EL.
1.5 A)
Code 12966

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 16137

CA 315 MD E W

Centrifugal duct fans for wall mounting



Certifications




IMQ Performance



TECHNICAL AND PERFORMANCE DATA

Absorbed power 1st speed (W)	48	Delivery 1st speed (l/s)	136.1
Frequency (Hz)	50/60	Delivery 1st speed (m ³ /h)	490
Insulation Class	II°	Max delivery at max speed (l/s)	286.1
IP	44	Max delivery at max speed (m ³ /h)	1030
Max absorbed Power at 60Hz (W)	175	Pressure - 1st speed (mmH2O)	35.7
Max ambient temperature for continuous operation (°C)	50	Pressure - 1st speed (Pa)	350.5
Max. absorbed Current at max. speed (A)	0,55	Pressure max - max speed (mmH2O)	58.2
Max. absorbed Current at min. speed (A)	0.48	Pressure max - max speed (Pa)	570.8
Max. absorbed power at max speed (W)	120	RPM max	2670
Nominal Diameter (mm)	315	RPM min	1335
Voltage (V)	220-240	Sound pressure level Lp [dB (A)] 3m - max speed	51.4
Weight (Kg)	9,4	Sound pressure level Lp [dB (A)] 3m - min speed	41.2

DIMENSIONS

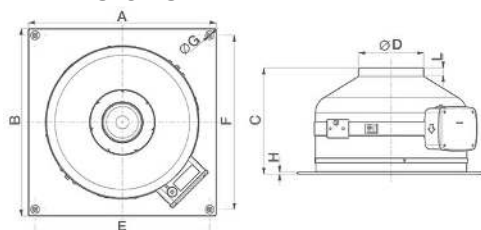

Size A (mm)	489
Size B (mm)	489
Size C (mm)	260
Size D (mm)	ø 312
Size E (mm)	459
Size F (mm)	459
Size G (mm)	ø 5
Size H (mm)	5
Size L (mm)	36
Size M (mm)	252

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 16137

CA 315 MD E W



Centrifugal duct fans for wall mounting



DESCRIPTION

- Pickled and phosphated steel housing/roof mounting plate with polyester powder-coated finish, resistant to the aggressive action of atmospheric agents.
- Nominal diameter 315 mm.
- 3 speed fan through TRIO-CA optional control (cod. 12869), consisting of:
 - External rotor AC motor with thermal overload cutout and shaft turning in ball bearings,
 - backward curved impeller.
- Operation controllable by remote sensors monitoring: Temperature, Relative Humidity, Smoke and Presence.
- Zinc-coated steel brackets for wall mounting.

CURVES

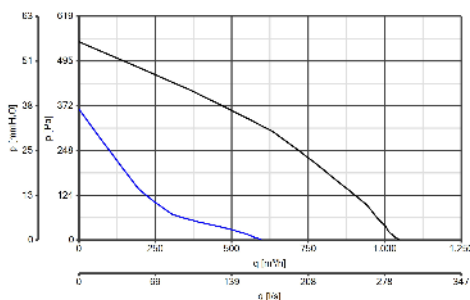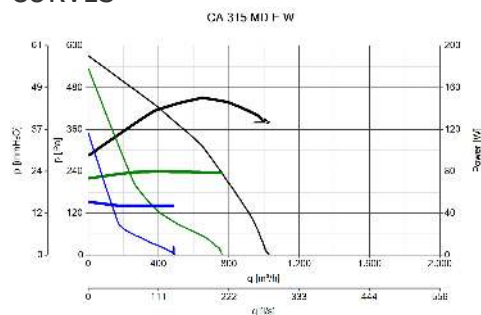

ACCESSORIES



TRIO-CA
Code 12869



**KIT SCB
(TRASF.E.C.)**
Code 22481



**CA-G 315
(GRIGLIA DI
PROTEZIONE)**
Code 22775



**C 1.5
(COMANDO EL.
1.5 A)**
Code 12966

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com