


AER CONDITIONAT INVERTER

CONTER BREEZE



Specificatii tehnice **12000 BTU**

Model			CONTER BREEZE 12 INW
Denumire model Midea			MSAFBU-12HRFN8-QRD1GW
Unitate Interioara			MSAFBU-12HRFN8-QRD1GW
Unitate Exterioara			MDX133-12HFN8-QRD1GW
Alimentare		Ph-V/Hz	220-240V, 1Ph, 50Hz
Racire nominala	Capacitate	Btu/h	12000 (3800~13400)
Putere racire intrare		W	1320 (83~1600)
Curent racire		A	5.8 (0.5~7.3)
Incalzire nominala	Capacitate	Btu/h	13000 (3700~14200)
Putere incalzire intrare		W	1190 (167~1400)
Curent incalzire		A	5,3 (1.4~6.4)
Racire sezoniera	Pdesignnc	kW	3,5
	SEER	WW	6,5
	Clasa eficienta energetica		A++
Incalzire(medie)	Pdesignnh	kW	2,8
	SCOP	WW	4,1
	Clasa eficienta energetica		A+
	Tbiv	°C	-7
Tol		°C	-15
Indepartare umiditate		L/h	/
Consum max intrare		W	2150
Curent max		A	10
Curent pomire		A	0
Compresor	Model		KSK103D32UEZ31
	Tip		Rotativ
	Brand		GMCC
	Capacitate	Btu/h	3245
	Intrare	W	850
	Curent nominal (RLA)	A	5,7
	Amplificator rotor blocat (LRA)	A	/
	Protector termic		/
	Pozitie protector termic		/
	Condensator	uF	/
	Ulei Refrigerant/incarcare ulei	ml	ESTER OIL VG74 280

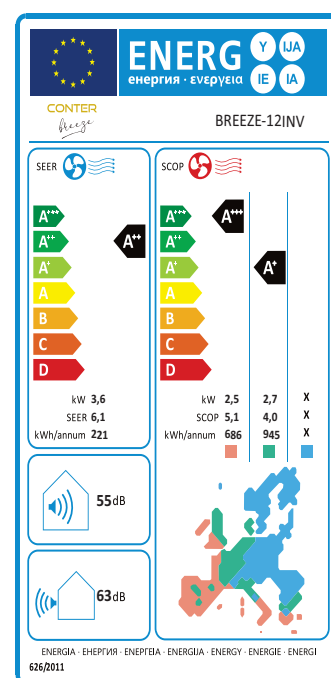

Motor ventilator unitate interioara	Model		ZKFP-30-8-357L
	lesire	W	35
	Condensator	uF	/
	Viteza (Hi/M/Lo)	r/min	1130/950/750
Serpentina unitate interioara	a. Numar de randuri		2
	b. Pas tub(a)xpas rand(b)	mm	19.5x11.6
	c. Distanța aripiore	mm	1.2
	d. Tip aripiore (cod)		Aluminiu hidrofilic
	e. Diametru ext. tub si tip	mm	Φ5, canal interior tub
	f. Lungime x inaltime x latime serpentina	mm	595x78x23.2+595x117x23.2+595x78x23.2
	g. Numar circuite		4
Debit aer unitate interioara (Hi/M/Lo)		m3/h	530/430/310
Nivel zgomot unitate interioara (Hi/M/Lo/Si)		dB(A)	39.5/35.5/25/21.5
Nivel zgomot unitate interioara (Hi)		dB(A)	54,0
Unitate interioara	Dimensiuni(W*D*H)	mm	805x194x285
	Ambalare (W*D*H)	mm	870x270x365
	Masa neta/bruta	Kg	7.3/9.5
Motor ventilator unitate exteriora	Model		ZKFN-25-10-5L
	lesire	W	/
	Condensator	uF	/
	Viteza (Hi/M/Lo)	r/min	1
Serpentina unitate exteriora	a. Numar de randuri		1
	b. Pas tub(a)xpas rand(b)	mm	18x17,3
	c. Distanța aripiore	mm	1.3
	d. Tip aripiore (cod)		Aluminiu hidrofilic
	e. Diametru ext. tub si tip	mm	Φ5, canal interior tub
	f. Lungime x inaltime x latime serpentina	mm	745x468x17,3
	g. Numar circuite		3
Debit aer unitate exteriora		m3/h	1750
Nivel zgomot unitate exteriora		dB(A)	55
Nivel max. zgomot unitate exteriora		dB(A)	64
Unitate exteriora	Dimensiuni(W*D*H)	mm	720x270x495
	Ambalare (W*D*H)	mm	835x300x540
	Masa Neta/bruta	Kg	21/22,8
Refrigerant	tip		R32
	GWP		675
	Cantitate incarcare	Kg	0.52
Presiune proiectata		MPa	4.3/1.7
Conducte refrigerant	Lateral lichid/ lateral gaz	mm(inch)	6.35mm(1/4in)/9.52mm(3/8in)
	Lungime max. conducta refrigerant	m	25
	Diferenta max. de nivel	m	10
Conexiuni cablaj			1.5x5//
Tip stecher			fara
Tip termostat			Comanda de la distanta
Temperatura lucru	Unitate interioara(racire/ incalzire)	℃	17 ~ 32/0 ~ 30
	Unitate exteriora(racire/ incalzire)	℃	-15 ~ 50 / -20 ~ 30
Domeniu aplicare	minim-maxim	m2	16~23

Caracteristici principale



Racire si incalzire



Control prin WIFI



Funcție Follow me



Auto curatare



Auto restart



Mod noapte (Sleep mode)

CONTER

breeze