



Ex-TRM150

Ex - TRM

Ex II 2G Ex d e IIC T6 Gb

Ex II 2D Ex tb IIIC T80 °C Db

FEMA room thermostats are suitable for industrial plants, for greenhouses, livestock buildings and warehouses, and also for monitoring the maximum temperature

in switchgear cabinets and relay stations. Room thermostats are supplied complete with wall bracket H1.



SIL 2 according IEC 61508-2


Technical data

Body	Diecast aluminium GD Al Si 12 according to DIN 1725. Resistant to ammoniacal vapours and seawater
Mounting position	vertically upright
Permitted ambient temperature	-20 to +60 °C
Permitted temperature at sensor	60°C
Contact arrangement	Single-pole changeover switch
Switching capacity	8 (5) A 250 VAC
Degree of protection	IP 65 according to DIN EN60529 (with vertical installation)
Mounting	With wall bracket H 1 or directly on the wall with 2 screws (Ø 4)
Calibration	Scale value corresponds to the lower switching point (with falling temperature), the upper switching point is higher by the amount of the switching differential
Switching temperature	Adjustable from outside with screwdriver
Switching differential	Not adjustable


Product Summary

Type	Setting range	Switching differential (mean values)
Ex-TRM022	-20 to +20 °C	1.0 K
Ex-TRM40	0 to +40 °C	1.0 K
Ex-TRM150	+10 to +50 °C	1.0 K

Dimensioned drawings (mm)

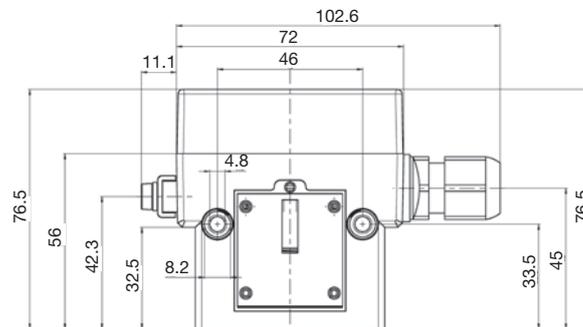


Switching housing

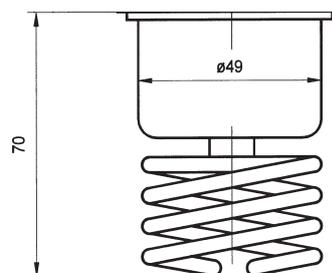

Temperature sensor


Mechanical thermostats

Principal technical data

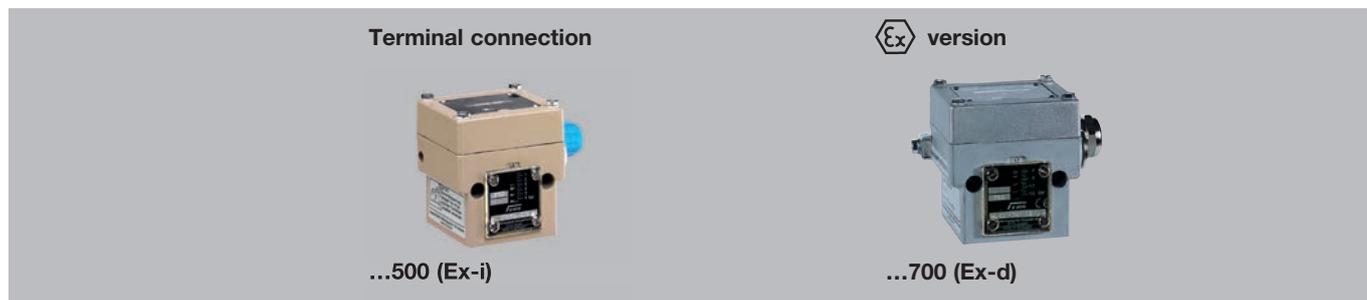

Switch housing
Switching function and connection scheme
(applies only to version with microswitch)

Diecast aluminium GDAISi 12
Floating changeover contact
With rising temperature
single pole switching from 3-1 to 3-2

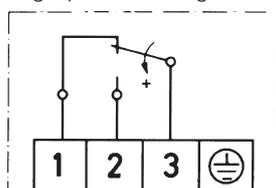

Switching capacity
(applies only to version with microswitch)

max. 100 mA, 24 VDC
min. 2 mA, 24 VDC

Mounting position
Protection class
(in vertical position)

Vertically upright
IP 65

Explosion protection
with immersion well

Ex II 1/2G Ex ia IIC T6 Ga/Gb
Ex II 1/2D Ex ia IIIC T80 °C

Electrical connection

Terminal connection

Cable entry
Ambient temperature
Switching point

M 16 x 1.5
-15 to +60 °C
Adjustable with spindle after
the terminal box cover is removed


Switching differential
Medium temperature
Vibration strength

not adjustable
Max. 60 °C
No significant deviations up to 4 g.
At higher accelerations, the switching differential is reduced slightly.
Use over 25 g is not permitted.


Isolation values

Overvoltage category III, contamination class 3, reference surge voltage 4000 V.
Conformity to DIN VDE 0110 is confirmed.


Sensor systems




Room sensor TRM



Capillary tube sensor TAM




Rod sensor TX+R10



Air duct sensor TX+R6

Diecast aluminium GDAISi 12
Floating changeover contact.
With rising temperature
single pole switching from 3-1 to 3-2

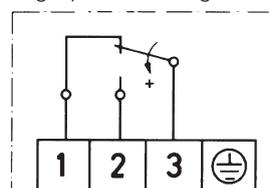

3 A at 250 VAC
2 A at 250 VAC inductive
3 A at 24 VDC
0.1 A at 250 VDC
min. 2 mA, 24 VDC

Vertically upright
IP 65

Ex II 2G Ex d e IIC T6 Gb
Ex II 1/2D Ex ta/tb IIIC T80 °C Da/Db

Exception: EX-TRM...:
Ex II 2G Ex d e IIC T6 Gb
Ex II 2D Ex tb IIIC T80 °C Db

Terminal connection

M 16 x 1.5
-20 to +60 °C
Adjustable with spindle after
the terminal box cover is removed

Not adjustable
Max. 60 °C

Temperature monitoring in explosion-endangered areas

 Temperature switches with special equipment can also be used in explosion risk areas Zone 1, 2 and 21, 22.

The following alternatives are possible:



1. Type of ignition protection Ex-d, Ex-e and Ex-t:

The thermostat with protection type "Flameproof Ex-d and Increased Safety Ex-e" can be used in hazardous areas of zone 1 and 2 for flammable gas mixtures. For use in dust atmospheres, the protection is "protected by enclosure Ex-t".

The thermostat may be used in hazardous areas of zones 21 and 22 for explosive dusts. In addition, for the dust – explosion protect zone 20 on the sensor (device screwed into container walls, which may occur in the interior permanent dust atmosphere).

The permissible values for switching voltage, switching capacity and ambient temperature please refer to the detailed description of the Ex equipment, and the installation and operating instructions. In addition, please note the general rules for the use and installation of equipment in hazardous atmosphere.

Special circuits, as well as versions with adjustable switching differential or internal interlock (reclosing lock) are not possible.

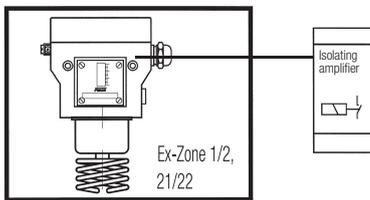

2. Ignition protection Ex-i

All thermostat with features for intrinsically safe circuits can be used in hazardous areas Zone 1 and 2 (Gas) and zones 21 and 22 (Dust). A circuit is considered to be "intrinsically safe" if the amount of energy conveyed therein is not capable of generating an ignitable sparks. This thermostat can only be operated in combination with a suitable isolating switching amplifier, which is approved for the type Ex-i. Because of the low voltages and currents in intrinsically safe circuits, micro switches with gold contacts are used for temperature monitors with automatic reset. FEMA thermostats for use in intrinsically safe circuit are marked by blue terminals and cable entries. In addition, the thermostats has been tested by a "notified body". The units get a serial number and the nameplate inform about the ignition protection and registration number.

Ignition protection for temperature monitoring in Zone 0 (20), 1 (21) and 2 (22)

Pressure-proof encapsulation Ex-d (EN60079-0:2009)	Intrinsically safe Ex-i (EN 60079-11:2012)
Enhanced safety Ex-e (EN60079-7:2007)	T...-513, ...-563
Protection via housing Ex-t (EN60079-31:2009)	
Ex-T...	

Marking, use in thermowell:

CE 0035  II 2G Ex d e IIC T6 Gb
CE 0035  II 1/2D Ex ta/tb IIIC T80°C Da/Db

Exception: EX-TRM...:

CE 0035  II 2G Ex d e IIC T6 Gb
CE 0035  II 2D Ex tb IIIC T80°C Db

Marking:

CE 0035  II 2G Ex ia IIC T6 Gb
CE 0035  II 2D Ex ia IIIC T80°C Db

ATEX approval for the complete switching device

ATEX approval for the complete switching device
ATEX approval for isolating amplifiers

Thermostat with a silver contact

Monitor with gold-plated contacts

Switching capacity:
max. 3 A, 250 VAC
min. 2 mA, 24 VDC

Rated value without resistor combination
...-513 / ...-563:
U_i: 24VDC
I_i: 100mA
C_i: 1nF
L_i: 100µH

Thermostat can be installed within the Ex-Zone

Thermostat will be installed in Ex-Zone.
The isolating amplifier must be installed outside the Ex-Zone.