


FOR ALUMINUM GAS SOLENOID VALVE WITH MANUAL RESET NA

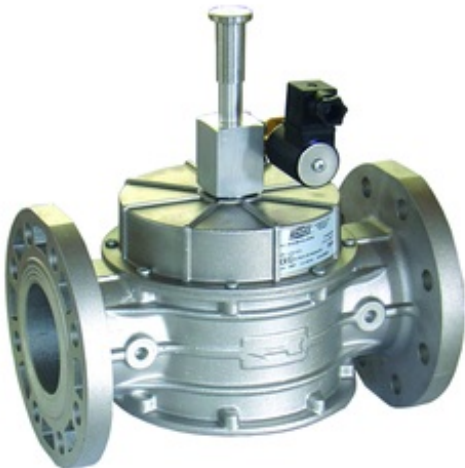

Product Description

Solenoid Valve for Gas aluminum Normally open tension-free manual reset - 230 Vac

- Flanged PN16

NOTE: Other voltages on request

VERSION AVAILABLE WITH P. MAX 6 bar
INCREASE OF 25% FROM NORMAL PRICE

 0497 solo only **6 bar**

PRESSIONE MAX 500 Mb
P. MAX 500 Mb

Properties

Impiego	Gas non aggressivi delle 3 famiglie (gas secchi)
Temperatura di esercizio	-15°/+60°C
Tensione	12 V, 24 V, 110 V, 230 V
Potenza assorbita	20-23 VA
Grado di protezione /	IP 65

Variants

Code	Mod. ø	Conf./Pack
50337	Ø DN 65 alluminio	1
50338	Ø DN 80 alluminio	1
50338 A	Ø DN 100 alluminio	1
50338 B	Ø DN 125 alluminio	1
50338 C	Ø DN 150 alluminio	1
50338 D	Ø DN 200 alluminio	1
50338 E	Ø DN 300 alluminio (prezzo su richiesta)	1

