



## Description

The **RADIK CLEAN** model is a steel panel radiator in the **KLASIK** version, which allows for **left or right side connection** to the heating system. It is designed for pressurised heating systems or those with gravity circulation. It is intended for installation and operation in rooms with high demands on hygiene and cleanliness. All types are supplied without convector fins, grilles and side covers.

Two upper and two lower fixing hangers are welded to the back, radiators 1800 mm in length or longer have six fixing hangers welded to the back. Basic equipment includes an air vent and blanking plug.


Note:

The RADIK CLEAN type 10 and RADIK KLASIK type 10 radiators are identical.


## Technical data

<b>Height H</b>	300, 400, 500, 600, 700, 900 mm
<b>Length L</b>	400, 500, 600, 700, 800, 900, 1000, 1100, 1200, 1400, 1600, 1800, 2000 mm
<b>Depth B</b>	
Type 10 CLEAN	47 mm
Type 20S CLEAN	100 mm
Type 30 CLEAN	155 mm
<b>Connecting pitch</b>	$h = H - 54$ mm
<b>Connecting thread</b>	4 x G1/2 inside
<b>Highest allowed working pressure</b>	10 bar
<b>Highest allowed working temperature</b>	110 °C
<b>Radiator connection</b>	left or right side

## Overview of types

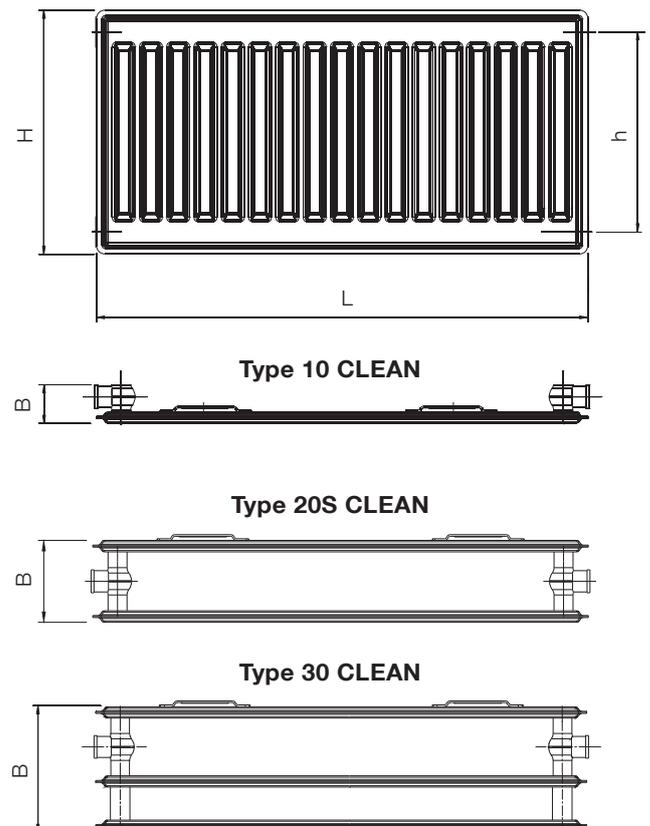

## Examples of connection to the heating system

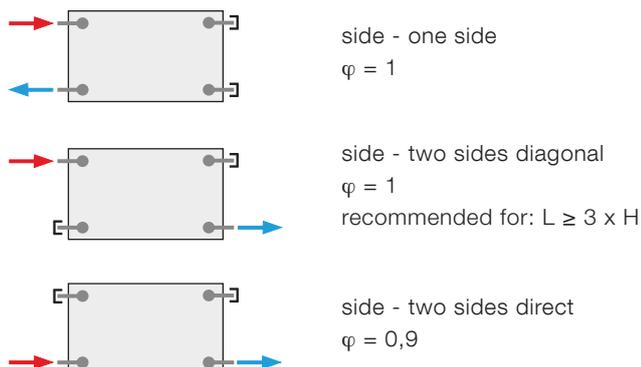

# RADIK CLEAN VK



## Description

The **RADIK CLEAN VK** model is a steel panel radiator in the VENTIL KOMPAKT version, which allows for **bottom right connection** to the heating system. It is designed for pressurised heating systems.

It is intended for installation and operation in rooms with high demands on hygiene and cleanliness. All types are supplied without convector fins, grilles and side covers.

Two upper and two lower fixing hangers are welded to the back, radiators 1800 mm in length or longer have six fixing hangers welded to the back. Basic equipment includes air vent and blanking plug.


Note:

The RADIK CLEAN VK type 10 and RADIK VK type 10 radiators are identical.


## Technical data

<b>Height H</b>	300, 400, 500, 600, 700, 900 mm
<b>Length L</b>	400, 500, 600, 700, 800, 900, 1000, 1100, 1200, 1400, 1600, 1800, 2000 mm
<b>Depth B</b>	
Type 10 CLEAN VK	47 mm
Type 20S CLEAN VK	100 mm
Type 30 CLEAN VK	155 mm
<b>Connecting pitch</b>	50 mm
<b>Connecting thread</b>	6 x G1/2 inside
<b>Highest allowed working pressure</b>	10 bar
<b>Highest allowed working temperature</b>	110 °C
<b>Radiator connection</b>	right bottom

## Overview of types

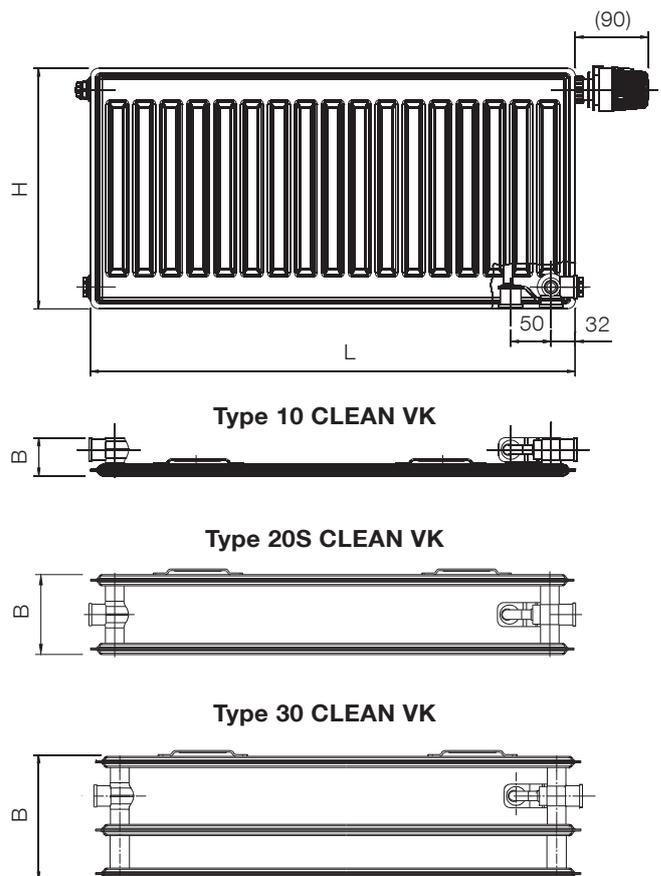

## Examples of connection to the heating system



right bottom  
 $\varphi = 1$

Guidelines for ordering are described on page 92.